

## PURE PERFORMANCE

DESIGNED FOR:

PERFORMANCE

SPEED

GRIP


TECH HIGHLIGHTS



### DESCRIPTION

Pirelli introduces **the new generation of P ZERO™ Race TLR** by further improving one of its best sellers on the market. Through a new carcass solution, it has worked on one of the important parameters when it comes to cycling tyres: the **rolling resistance**. The new **SpeedCORE™** carcass is then a thin air-tight layer of rubber compound with aramid particles that covers the internal part of the tyre. The greatest flexibility of the rubber compound makes the tyre **faster and more supple**, while the presence of the aramid allows for better puncture resistance. The carcass is completed by a **120tpi nylon fabric** plus an **anti-puncture aramid breaker**, while the tread pattern keeps Pirelli most advanced compound, the SmartEVO, in order to provide the highest performance. All the special features of the new **P ZERO™ Race TLR** are skillfully crafted in Italy providing unique quality and superior performance.

### CHARACTERISTICS

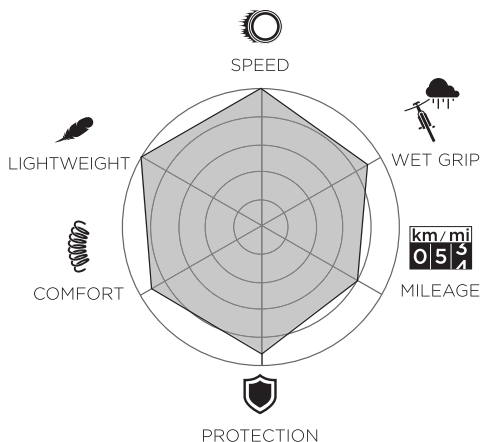

### APPLICATIONS



### SEASONALITY (☀ & ☁)



- NOT INTENDED USE
- POSSIBLE USE
- INTENDED USE

# TECH OVERVIEW

## 1 COMPOUND



Latest generation blend of smart polymers to provide maximum grip with a low rolling resistance

ALLOWS FOR MAXIMUM SPEED AND CONTROL

## 2 STRUCTURE



Cutting-edge TLR casing technology with an inner layer of aramid compound plus an aramid breaker

FAST YET VERY COMFORTABLE RIDING

## 3 MOUNTING & SIZING



**Hookless compatibility:**  
 - sizes 26-622 and below are **NOT compatible** with hookless rims  
 - sizes 28-622 and above are **compatible** with hookless rims subject to ETRTO **5bar/73psi max pressure limitation.**

### PZERO™ RACE TLR 26-622

#### Size development @6bar /72 psi

RIM	WAM	OUTER DIAMETER	RAM
17 C	25mm	680mm	340mm
19 C	26mm	680mm	340mm
21 C	27mm	680mm	340mm

### PZERO™ RACE TLR 28-622

#### Size development @5.5 bar/80psi

RIM	WAM	OUTER DIAMETER	RAM
17 C	27mm	686mm	343mm
19 C	28mm	686mm	343mm
21 C	29mm	686mm	343mm

### PZERO™ RACE TLR 30-622

#### Size development @5 bar/73psi

RIM	WAM	OUTER DIAMETER	RAM
19 C	29mm	690mm	345mm
21 C	30mm	690mm	345mm
23 C	31mm	690mm	345mm

DESCRIPTION	RIM	IPCODE	CASING	TECHNOLOGY	WEIGHT	COMPOUND
PZERO™ Race <i>TLR</i> 26-622	19 C	4149500	120tpi, TLR	SPEEDCore	275g	SmartEVO
PZERO™ Race <i>TLR</i> 28-622	19 C	4149600	120tpi, TLR	SPEEDCore	295g	SmartEVO
PZERO™ Race <i>TLR</i> 30-622	21 C	3983700	120tpi, TLR	SPEEDCore	315g	SmartEVO
PZERO™ Race <i>TLR</i> 32-622	21 C	4155300	120tpi, TLR	SPEEDCore	335g	SmartEVO
PZERO™ Race <i>TLR</i> 35-622	23 C	4155400	120tpi, TLR	SPEEDCore	355g	SmartEVO
PZERO™ Race <i>TLR</i> 40-622	23 C	4155500	120tpi, TLR	SPEEDCore	375g	SmartEVO
PZERO™ Race <i>TLR</i> 26-622 <i>Classic</i>	19 C	3984200	120tpi, TLR	SPEEDCore	275g	SmartEVO
PZERO™ Race <i>TLR</i> 28-622 <i>Classic</i>	19 C	3984300	120tpi, TLR	SPEEDCore	295g	SmartEVO
PZERO™ Race <i>TLR</i> 30-622 <i>Classic</i>	21 C	4329500	120tpi, TLR	SPEEDCore	315g	SmartEVO