

P ZERO™ RACE TLR 4S

MADE  IN ITALY

ALL WEATHER PERFORMANCE

DESIGNED FOR:

4 SEASON

WET GRIP

HANDLING

TECH HIGHLIGHTS:

SMARTNET™
SILICA

SPEEDCORE™

**TUBELESS
READY**




DESCRIPTION:

The **P ZERO™ Race TLR 4S** has the fundamental characteristics of a year-round racing tyre: it offers consistent grip performance in all types of weather, including wet and cold days and provides the racing feeling that makes the P ZERO™ Race range the preferred choice of professional cyclists.

Exceptional performance is achieved through the **SPEEDCORE™ tubeless technology** and **SmartNET™ Silica compound**. The former being the latest evolution in Pirelli's casing constructions, while the latter being the best formulation for wet and chemical grip. The casing is then completed by a 120tpi nylon casing and nylon breaker to increase puncture protection. The overall result is then a tyre which provides more wet grip, durability and puncture resistance especially in wet conditions.

CHARACTERISTICS:

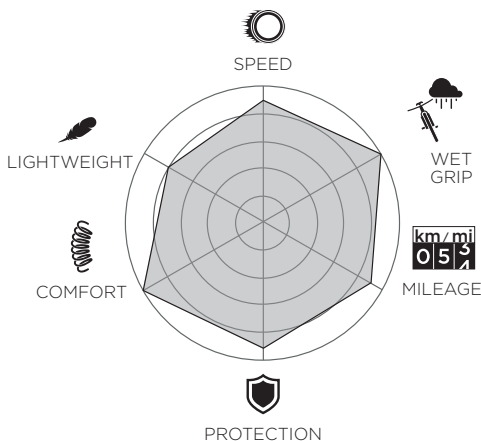

APPLICATIONS



SEASONALITY (☀ & ☁)



- NOT INTENDED USE
- POSSIBLE USE
- INTENDED USE



POWER IS NOTHING WITHOUT CONTROL

TECH OVERVIEW:

1 Compound



**SMARTNET™
SILICA**

▷ Patented road-specific formulation developed with silica rod molecules



WET GRIP AND DURABILITY

2 Structure




SPEEDCORE™

▷ Cutting-edge TLR casing technology with an inner layer of aramid compound plus an aramid breaker



FAST YET VERY COMFORTABLE RIDING

3 Mounting & Sizing



**TUBELESS
READY**

Rim compatibility developed under ETRTO standards and for modern wide rims

Hookless compatibility:

- sizes 26-622 and below **are NOT compatible** with hookless rims
- sizes 28-622 and above **are compatible** with hookless rims subject to ETRTO **5bar/73psi max pressure limitation.**

PZERO™ RACE TLR 4S 28-622

Size development @ 5,5bar/80psi

RIM	WAM	OUTER DIAMETER	RAM
17 C	27mm	686mm	343mm
19 C	28mm	686mm	343mm
21 C	29mm	686mm	343mm

PZERO™ RACE TLR 4S 30-622

Size development @ 5bar/73psi

RIM	WAM	OUTER DIAMETER	RAM
19 C	29mm	690mm	345mm
21 C	30mm	690mm	345mm
23 C	31mm	690mm	345mm

PZERO™ RACE TLR 4S 32-622

Size development @ 4,5bar/65psi

RIM	WAM	OUTER DIAMETER	RAM
19 C	31mm	692mm	346mm
21 C	32mm	692mm	346mm
23 C	33mm	692mm	346mm

DESCRIPTION	RIM	IPCODE	CASING	TECHNOLOGY	WEIGHT (g)	COMPOUND
PZERO™ Race TLR 4S 28-622	19 C	4203500	120tpi, TLR	SPEEDCore	330	SmartNET Silica
PZERO™ Race TLR 4S 30-622	21 C	4203600	120tpi, TLR	SPEEDCore	365	SmartNET Silica
PZERO™ Race TLR 4S 32-622	21 C	4203700	120tpi, TLR	SPEEDCore	395	SmartNET Silica