






DESCRIPTION

Crafted to offer **maximum protection and comfort**, for longer lasting performance in various riding conditions, from leisure weekend rides to fast urban commuting. Pirelli combines its advanced developments in compound and construction technology, **SmartNET™ Silica** and tube-type **TechWALL+™**, resulting in a product which is as reliable and comfortable as versatile, for both long-distances and/or various terrains.

Cinturato Road is your next choice for daily riding, whatever it means to you.

CHARACTERISTICS

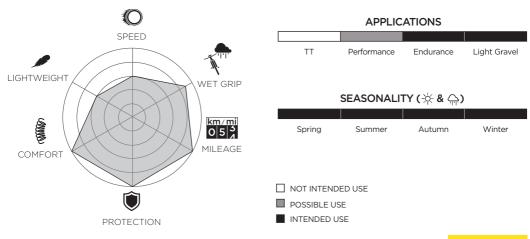

TECH OVERVIEW

1 COMPOUND





Elongated patented Silica molecules provide great grip while mantaining rolling resistance efficiency



STRUCTURE





Tube-type technology with multiple layers of reinforcement, including a bead-to-bead fabric and a nylon breaker



3 MOUNTING & SIZING



All sizes are **not compatible** with hookless rims

CINTURATO™ ROAD 26-622				
Size development @6 bar/87psi				
RIM	WAM	OUTER DIAMETER	RAM	
17 C	25mm	680mm	340mm	
19 C	26mm	680mm	340mm	
21 C	27mm	680mm	340mm	

CINTURATO™ ROAD 28-622				
Size development @6 bar/87psi				
RIM	WAM	RAM		
17 C	27mm	688mm	344mm	
19 C	28mm	688mm	344mm	
21 C	29mm	688mm	344mm	

CINTURATO™ ROAD 32-622				
Size development @5 bar/73psi				
RIM	WAM	RAM		
19 C	31mm	694mm	347mm	
21 C	32mm	694mm	347mm	
23 C	33mm	694mm	347mm	

CINTURATO [™] ROAD 35-622				
Size development @ 4,5bar/65psi				
RIM	WAM	RAM		
21 C	34mm	698mm	349mm	
23 C	35mm	698mm	349mm	
25 C	36mm	698mm	349mm	

DESCRIPTION	RIM	IPCODE	TPI	TECHNOLOGY	WEIGHT (g)	COMPOUND
Cinturato™ Road 26-622	15 C	4356800	60tpi	TechWALL+	300	Smartnet Silica
Cinturato™ Road 28-622	17 C	4356700	60tpi	TechWALL+	330	Smartnet Silica
Cinturato™ Road 32-622	19 C	4356600	60tpi	TechWALL+	350	Smartnet Silica
Cinturato™ Road 35-622	19 C	4356500	60tpi	TechWALL+	370	Smartnet Silica

