

# P ZERO™ ROAD TLR

## ALL-ROUND PERFORMANCE

### DESIGNED FOR:

HANDLING

COMFORT

PROTECTION

### TECH HIGHLIGHTS

EVO COMPOUND

TECHLINER ROAD


TUBELESS READY



### DESCRIPTION

The most complete and versatile tyre in its range, now with TLR technology. The **P ZERO™ ROAD TLR** is intended to be the perfect solution for cyclists who are looking for a more balanced and all-round performance focused on endurance. Used as a training tyre by our professional riders, P ZERO™ ROAD TLR is the perfect compromise between speed and comfort and protection. An all-in-one product to accompany you on all your rides. The technology behind P ZERO™ ROAD TLR is the innovative **TechLINER casing**, a 120 TPI casing coupled with a **rubber liner for better pressure retention**, this coupled with the amazing grip and control of the **Evo compound**, allows for smooth reliable performance.

### CHARACTERISTICS

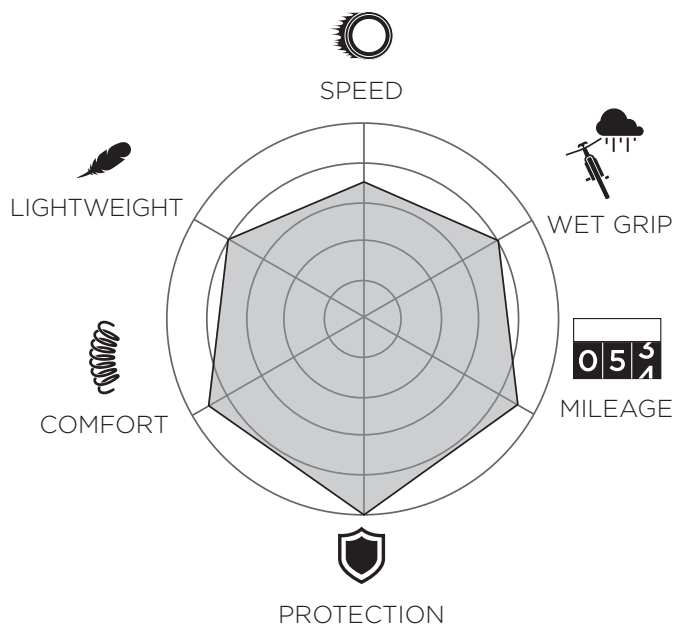

### APPLICATIONS



### SEASONALITY (☀️ & ☁️)



- ☐ NOT INTENDED USE
- ▒ POSSIBLE USE
- INTENDED USE

# TECH OVERVIEW

## 1 COMPOUND



**EVO COMPOUND**

High-tech formulation that provides good grip and low rolling resistance at the same time, offering a great balance of mileage and all-round performances.

ALLOWS YOU TO RIDE LONGER AND FURTHER

## 2 STRUCTURE




**TECHLINER ROAD**

State-of-the-art TLR casing technology with an inner rubber layer for maximum pressure retention.

FAST, COMFORTABLE AND RELIABLE

## 3 MOUNTING & SIZING



### Hookless compatibility:

- sizes **compatible** with hookless rims subject to ETRTO **5bar/73psi max pressure limitation.**

**TUBELESS READY**

Rim compatibility developed under ETRTO standards and for modern wide rims

### PZERO™ RACE TLR 28-622

#### Size development @5,5 bar/80psi

RIM	WAM	OUTER DIAMETER	RAM
17 C	27mm	686mm	343mm
19 C	28mm	686mm	343mm
21 C	29mm	686mm	343mm

### PZERO™ RACE TLR 30-622

#### Size development @5 bar/73psi

RIM	WAM	OUTER DIAMETER	RAM
19 C	29mm	690mm	345mm
21 C	30mm	690mm	345mm
23 C	31mm	690mm	345mm

### PZERO™ RACE TLR 32-622

#### Size development @4,5 bar/65psi

RIM	WAM	OUTER DIAMETER	RAM
19 C	31mm	692mm	346mm
21 C	32mm	692mm	346mm
23 C	33mm	692mm	346mm

### PZERO™ RACE TLR 35-622

#### Size development @5 bar/73psi

RIM	WAM	OUTER DIAMETER	RAM
21 C	34mm	696mm	348mm
23 C	35mm	696mm	348mm
25 C	36mm	696mm	348mm

DESCRIPTION	RIM	IPCODE	CASING	TECHNOLOGY	WEIGHT (g)	COMPOUND
PZERO™ Road <i>TLR</i> 28-622	19 C	4114300	120tpi, TLR	TechLINER	340	Evo Compound
PZERO™ Road <i>TLR</i> 30-622	19 C	4114400	120tpi, TLR	TechLINER	370	Evo Compound
PZERO™ Road <i>TLR</i> 32-622	21 C	4155200	120tpi, TLR	TechLINER	400	Evo Compound
PZERO™ Road <i>TLR</i> 35-622	23 C	4292900	120tpi, TLR	TechLINER	430	Evo Compound