

# Cinturato™ ROAD TLR

## ALL-ROUND PROTECTION

DESIGNED FOR:

PROTECTION

MILEAGE

GRIP

TECH HIGHLIGHTS

**SMARTNET™**  
SILICA

**TECHWALL+™**  
ROAD




## DESCRIPTION

Cinturato™ Road TLR is crafted to offer **maximum protection and comfort**, for longer lasting rides in various conditions, from **leisure weekend tours to fast urban commuting**.

Pirelli has combined its advanced developments in compound and construction technology, SmartNET™ Silica and TLR TechWALL+, resulting in a product which is as reliable and comfortable as versatile, for both long-distances and/or diverse terrains.

## CHARACTERISTICS

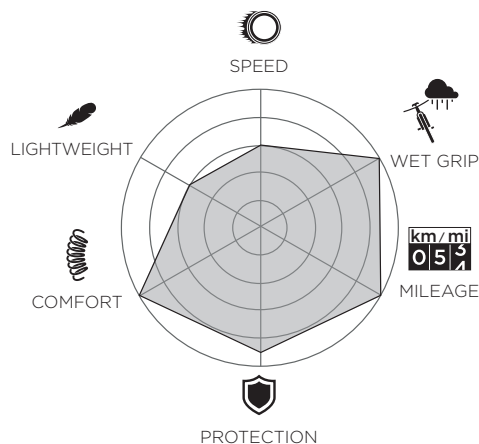

## APPLICATIONS



## SEASONALITY (☀ & ☂)



- ☐ NOT INTENDED USE
- ☒ POSSIBLE USE
- ☒ INTENDED USE

# TECH OVERVIEW

## 1 COMPOUND



**SMARTNET™  
SILICA**

Elongated patented Silica molecules provide great grip while maintaining rolling resistance efficiency

**SUPERIOR GRIP & ROLLING RESISTANCE IN ANY WEATHER CONDITION**

## 2 STRUCTURE




**TECHWALL+  
ROAD**

Road Tubeless Technology with multiple layers of reinforcement to provide superior puncture protection and high mileage

**ALL-ROUND PERFORMANCE WITH EXEPTIONAL PUNCTURE PROTECTION TO GO FURTHER**

## 3 MOUNTING & SIZING



Sizes **26-622** and **below** are **NOT compatible with hookless rims**.  
Sizes **28-622** and **above** are **compatible with hookless rims** subject to the following pressure chart

MAX PRESSURE [BAR]			
TYRE WIDTH	HOOKLESS TUBELESS RIMS (TSS)	HOOKED TUBELESS RIMS (TC/C)	TUBETYPE
26	Not allowed	6,5	7
28	5 (max internal rim width 23mm)	6,5	7
32	4,5	6	6,5
35	4	5	5.5

CINTURATO™ ROAD TLR 26-622			
Size development @ 6 bar/87psi			
RIM	WAM	OUTER DIAMETER	RAM
17 C	25mm	680mm	340mm
19 C	26mm	680mm	340mm
21 C	27mm	680mm	340mm

CINTURATO™ ROAD TLR 28-622			
Size development @ 6 bar/87psi			
RIM	WAM	OUTER DIAMETER	RAM
17 C	27mm	688mm	344mm
19 C	28mm	688mm	344mm
21 C	29mm	688mm	344mm

CINTURATO™ ROAD TLR 32-622			
Size development @ 5 bar/73psi			
RIM	WAM	OUTER DIAMETER	RAM
19 C	31mm	694mm	347mm
21 C	32mm	694mm	347mm
23 C	33mm	694mm	347mm

CINTURATO™ ROAD 35-622			
Size development @ 4,5bar/65psi			
RIM	WAM	OUTER DIAMETER	RAM
21 C	34mm	698mm	349mm
23 C	35mm	698mm	349mm
25 C	36mm	698mm	349mm

DESCRIPTION	RIM	IPCODE	TPI	TECHNOLOGY	WEIGHT (g)	COMPOUND
Cinturato™ Road TLR 26-622	19 C	4528900	60tpi	TechWALL+	305	Smartnet Silica
Cinturato™ Road TLR 28-622	19 C	4528800	60tpi	TechWALL+	345	Smartnet Silica
Cinturato™ Road TLR 32-622	21 C	4529000	60tpi	TechWALL+	375	Smartnet Silica
Cinturato™ Road TLR 35-622	23 C	4529100	60tpi	TechWALL+	415	Smartnet Silica