

P4TM SPORT

LONG-LASTING DURABILITY

DESIGNED FOR:

DURABILITY

MILEAGE

VALUE FOR MONEY

TECH HIGHLIGHTS

PRO⁺COMPOUND


TECHBELT[®]
ROAD



DESCRIPTION

P4TM Sport is designed to meet the demands of long-distance riders and those who **prioritize durability as key performance factor**. This tyre features our **TechBELT Road technology with 26 TPI casing**, which provides a balance between strength and flexibility, allowing for a smooth yet resilient ride. A **reinforced puncture protection layer** adds an extra barrier against flats, making it ideal for rougher road surfaces and high-mileage use. The ProCompound is engineered specifically for endurance, using a formulation that enhances wear resistance, ensuring that the tyre holds up over extensive use. Combining Pirelli's expertise in rubber technology with practical features for durability, this tyre is set to be a reliable option for road cyclists looking to tackle long rides with fewer concerns about tyre longevity or punctures.

CHARACTERISTICS

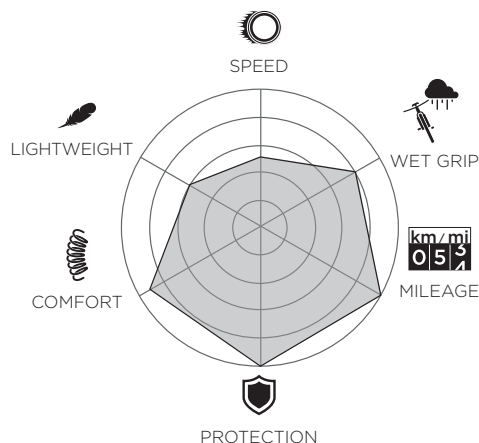

APPLICATIONS



SEASONALITY (☀ & ☁)



- ☐ NOT INTENDED USE
- ☒ POSSIBLE USE
- ☒ INTENDED USE

TECH OVERVIEW

1 COMPOUND



PROCOMPOUND

Mileage oriented formulation without compromising on grip. Tread pattern design with more sipes to enhance warming up and grip in colder conditions.

ALLOWS YOU TO RIDE IN CONTROL IN NEARLY ALL CONDITIONS

2 STRUCTURE




TECHBELT ROAD

26 TPI nylon casing structure with an added layer of high cut resistant fabric underneath the tread to provide superior puncture protection in a wide variety of conditions.

GOOD PUNCTURE PROTECTION AND COMFORT IN AN EXCELLENT TRAINING TYRE

3 MOUNTING & SIZING



P4™ Sport is a tube-type tyre and therefore **not compatible with hookless rims**.

| P4™ SPORT 24-622 | | | |
|-------------------------------|------|----------------|-------|
| Size development @6 bar/87psi | | | |
| RIM | WAM | OUTER DIAMETER | RAM |
| 17 C | 24mm | 676mm | 338mm |
| 19 C | 25mm | 676mm | 338mm |

| P4™ SPORT 28-622 | | | |
|---------------------------------|------|----------------|-------|
| Size development @5.5 bar/73psi | | | |
| RIM | WAM | OUTER DIAMETER | RAM |
| 17 C | 27mm | 688mm | 344mm |
| 19 C | 28mm | 688mm | 344mm |
| 21 C | 29mm | 688mm | 344mm |

| P4™ SPORT 26-622 | | | |
|-------------------------------|------|----------------|-------|
| Size development @6 bar/87psi | | | |
| RIM | WAM | OUTER DIAMETER | RAM |
| 17 C | 25mm | 682mm | 341mm |
| 19 C | 26mm | 682mm | 341mm |
| 21 C | 27mm | 682mm | 341mm |

| P4™ SPORT 32-622 | | | |
|---------------------------------|------|----------------|-------|
| Size development @ 5.5bar/65psi | | | |
| RIM | WAM | OUTER DIAMETER | RAM |
| 19 C | 31mm | 694mm | 347mm |
| 21 C | 32mm | 694mm | 347mm |
| 23 C | 33mm | 694mm | 347mm |

| 24-622 P4 SPORTTM | RIM | IPCODE | TPI | TECHNOLOGY | WEIGHT (g) | COMPOUND |
|-------------------|------|---------|-------|------------|------------|-------------|
| 24-622 P4™ Sport | 17 C | 4552400 | 26tpi | TechBELT | 290 | ProCOMPOUND |
| 26-622 P4™ Sport | 19 C | 4552200 | 26tpi | TechBELT | 315 | ProCOMPOUND |
| 28-622 P4™ Sport | 19 C | 4552300 | 26tpi | TechBELT | 350 | ProCOMPOUND |
| 32-622 P4™ Sport | 21 C | 4552100 | 26tpi | TechBELT | 395 | ProCOMPOUND |