





## ALL-ROUND PERFORMANCE




#### DESCRIPTION

The 2nd generation of PZERO Race TLR is our most all-round model in the P ZERO family, as well as being the first tire with a proprietary tubeless technology entirely made in Italy. The patent-pending SPEEDCORE structure features a 120tpi carcass along with a layer of compound reinforced with aramid particles: this unique blend of polymers deliver not only complete airtightness, but also a strong resistance against punctures, without stiffening the whole structure. The SmartEVO compound adds then grip and mileage in all conditions, dry and wet, and it does so with its content of natural rubber fully certified FSC\*, another milestone that Pirelli introduced in 2024 in all its bicycle tires Made in Italy. The result is a reliable, comfortable and fast tire all in one, ready for World Tour racing as well as long distances on daily training rides.

The latest addition to the family is the NERO version that uses the HIGH CONTRAST technology. This technology, derived from the Pirelli know-how in the automotive industry, allows the creation of a highend detailing on the tire's sidewall; providing a modern, clean and premium look.

#### **CHARACTERISTICS**

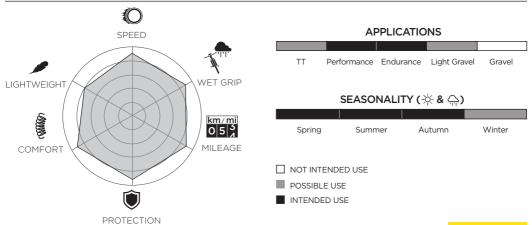



### **TECH OVERVIEW**

### COMPOUND







Advanced blend of smart polymers to provide maximum grip with a low rolling resistance. The natural rubber content is FSC\*-certified and accounts from 13.7% to 17.1% of the total weight.



#### **STRUCTURES**





Cutting-edge TLR casing technology with an inner layer of aramid particles plus an aramid breaker.





**HIGH**CONTRAST

HIGH CONTRAST delivers a minimalistic yet bold design, enhancing the sidewall finishing visual appeal with precise, highdefinition detailing.



#### MOUNTING & SIZING -



#### Hookless compatibility:

Sizes 26-622 and below are NOT compatible with hookless rims

Sizes 28-622 and above are compatible with hookless rims subject to ETRTO 5bar/73psi max pressure limitation.

	PZERO™	RACE TLR 26-622					
Size development @6bar /87 psi							
RIM	WAM	OUTER DIAMETER	RAM				
17 C	25mm	680mm	340mm				
19 C	26mm	680mm	340mm				
21 C	27mm	680mm	340mm				

Size development @6bar /87 psi							
RIM	WAM	OUTER DIAMETER	RAM				
17 C	25mm	680mm	340mm				
19 C	26mm	680mm	340mm				
21 C	27mm	680mm	340mm				

Size development @5 bar/73 psi						
	PZERO™	RACE TLR 30-62	2			
21 C	27mm	680mm	340mm			
19 C	26mm	680mm	340mm			
., 0	20111111	000	0.10111111			

Size development @5 bar/73 psi							
RIM	WAM	OUTER DIAMETER	RAM				
19 C	29mm	690mm	345mm				
21 C	30mm	690mm	345mm				
23 C	31mm	690mm	345mm				

PZERO™ RACE TLR 35-622								
	Size development @5 bar/73 psi							
RIM	OUTER DIAMETER	RAM						
21 C	34mm	700mm	350mm					
23 C	35mm	700mm	350mm					
25 C	36mm	700mm	350mm					

ı	PZERO™ RACE TLR 28-622							
	Size development @5.5 bar/80 psi							
	RIM	WAM	OUTER DIAMETER	RAM				
	17 C	27mm	686mm	343mm				
	19 C	28mm	686mm	343mm				
	21 C	29mm	686mm	343mm				

PZERO™ RACE TLR 32-622								
Size development @5 bar/73 psi								
RIM WAM OUTER DIAMETER RA								
19 C	31mm	695mm	348mm					
21 C	32mm	695mm	348mm					
23 C	33mm	695mm	348mm					

PZERO™ RACE TLR 40-622								
Size development @5 bar/73 psi								
RIM	WAM	OUTER DIAMETER	RAM					
21 C	39mm	706mm	353mm					
23 C	40mm	706mm	353mm					
25 C	41mm	706mm	353mm					





# THE RANGE

DESCRIPTION	RIM	IPCODE	CASING	TECHNOLOGY	WEIGHT	COMPOUND
PZERO™ Race <i>TLR</i> 26-622	19 C	4149500	120tpi, TLR	SPEEDCore	290g	SmartEVO
PZERO™ Race <i>TLR</i> 28-622	19 C	4149600	120tpi, TLR	SPEEDCore	315g	SmartEVO
PZERO™ Race <i>TLR</i> 30-622	21 C	3983700	120tpi, TLR	SPEEDCore	335g	SmartEVO
PZERO™ Race <i>TLR</i> 32-622	21 C	4155300	120tpi, TLR	SPEEDCore	369g	SmartEVO
PZERO™ Race <i>TLR</i> 35-622	23 C	4155400	120tpi, TLR	SPEEDCore	400g	SmartEVO
PZERO™ Race <i>TLR</i> 40-622	23 C	4155500	120tpi, TLR	SPEEDCore	460g	SmartEVO
PZERO™ Race <i>TLR</i> 26-622 <i>Classic</i>	19 C	3984200	120tpi, TLR	SPEEDCore	290g	SmartEVO
PZERO™ Race <i>TLR</i> 28-622 <i>Classic</i>	19 C	3984300	120tpi, TLR	SPEEDCore	315g	SmartEVO
PZERO™ Race <i>TLR</i> 30-622 <i>Classic</i>	21 C	4329500	120tpi, TLR	SPEEDCore	335g	SmartEVO
PZERO™ Race <i>TLR 32-622 Classic</i>	21 C	4433800	120tpi, TLR	SPEEDCore	375g	SmartEVO
PZERO™ Race <i>TLR</i> 28-622 <i>Retro</i>	19 C	4417300	120tpi, TLR	SPEEDCore	315g	SmartEVO
PZERO™ Race <i>TLR</i> 30-622 <i>Retro</i>	21 C	4417400	120tpi, TLR	SPEEDCore	335g	SmartEVO
PZERO™ Race <i>TLR</i> 28-622 <i>Nero</i>	19 C	4416700	120tpi, TLR	HIGHcontrast	317g	SmartEVO
PZERO™ Race <i>TLR</i> 30-622 <i>Nero</i>	21 C	4416800	120tpi, TLR	HIGHcontrast	320g	SmartEVO



# **COLOUR EDITION**

DESCRIPTION	RIM	IPCODE	CASING	TECHNOLOGY	WEIGHT	COMPOUND
PZERO™ Race <i>TLR</i> 26-622 <i>Gold</i>	19 C	4416500	120tpi, TLR	SPEEDCore	290g	SmartEVO
PZERO™ Race <i>TLR</i> 28-622 <i>Gold</i>	19 C	4416600	120tpi, TLR	SPEEDCore	315g	SmartEVO
PZERO™ Race <i>TLR</i> 26-622 <i>Red</i>	19 C	4204300	120tpi, TLR	SPEEDCore	290g	SmartEVO
PZERO™ Race <i>TLR</i> 28-622 <i>Red</i>	19 C	4204600	120tpi, TLR	SPEEDCore	315g	SmartEVO
PZERO™ Race <i>TLR</i> 26-622 <i>White</i>	19 C	4204200	120tpi, TLR	SPEEDCore	290g	SmartEVO
PZERO™ Race <i>TLR</i> 28-622 <i>White</i>	19 C	4204500	120tpi, TLR	SPEEDCore	315g	SmartEVO
PZERO™ Race <i>TLR</i> 26-622 <i>Yellow</i>	19 C	4204100	120tpi, TLR	SPEEDCore	290g	SmartEVO
PZERO™ Race <i>TLR</i> 28-622 <i>Yellow</i>	19 C	4204400	120tpi, TLR	SPEEDCore	315g	SmartEVO
PZERO™ Race <i>TLR</i> 28-622 <i>Blue</i>	19 C	4568000	120tpi, TLR	SPEEDCore	315g	SmartEVO
PZERO™ Race <i>TLR</i> 28-622 <i>Pink</i>	19 C	4568100	120tpi, TLR	SPEEDCore	315g	SmartEVO

