

SPEED PERFORMANCE

DESIGNED FOR

- ULTIMATE SPEED
- LOW DRAG
- HANDLING




TECH HIGHLIGHTS




DESCRIPTION

P ZERO™ Race SL-R is the latest and most advanced tyre in the P ZERO™ Race road-racing range. Developed with pure speed in mind, it has been engineered with **aerodynamic optimization features (PAAS - Pirelli Advanced Aero System)**, featuring patent-pending technologies designed to reduce flow separation and maximize the rim sailing effect ultimately lowering overall aerodynamic drag. P ZERO™ Race SL-R introduces the new **LiteCore construction**, Pirelli's lightest and most efficient TLR casing, delivering an exceptionally supple ride feel and outstanding rolling-resistance performance. The **SmartEVO² compound** ensures excellent grip and control in both dry and wet road conditions. Made in Italy with its slick design, fine-tuned micro texture and integrated aero features, P ZERO™ Race SL-R represents the fastest of the P ZERO™ Race range for road and time trial racing.

CHARACTERISTICS

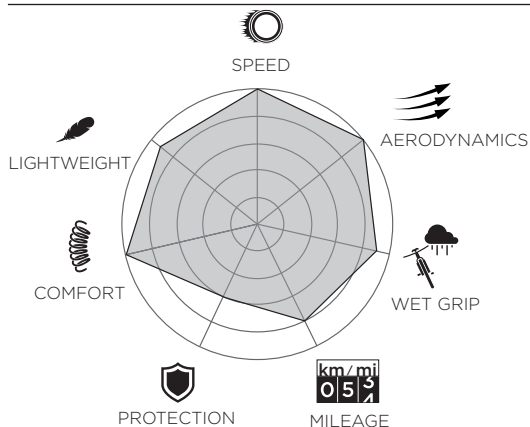

APPLICATIONS



SEASONALITY (☀️&☁️)




- NOT INTENDED USE
- POSSIBLE USE
- INTENDED USE

*The natural rubber of this tyre is FSC®-certified and accounts for the 21% of the total weight of the tire.

TECH OVERVIEW

1 SMARTEVO² COMPOUND

OUR MOST ADVANCED SMART-POLYMERS BLEND DERIVED FROM PIRELLI'S MOTORSPORT KNOW-HOW.



Latest generation blend of functionalized Smart Polymers to combine opposite characteristics in a single molecular chain.



FAST YET GRIPPY IN ALL CONDITIONS

2 LITECORE

TUBELESS READY CONSTRUCTION ENGINEERED TO PROVIDE THE BEST ROLLING EFFICIENCY AT LOW WEIGHT.



The fastest and most compliant TLR casing in our range. Developed to deliver low rolling and the optimal suppleness to provide enhanced comfort and grip.




DESIGNED TO DELIVER LOW ROLLING RESISTANCE AND SUPERIOR RIDE FEEL

3 P.A.S.

PIRELLI ADVANCED AERODYNAMIC SYSTEM

CFD-developed technology that includes multiple aerodynamic features aimed to increase the efficiency of the Tyre+Wheel system.





▶ Patent pending profile shape to create seamless connection with the rim to keep the airflow attached.

▶ Designed to work at its best with modern wide rims.



ENGINEERED TO MAXIMISE THE SAILING EFFECT OF YOUR WHEELS TO PROVIDE THE BEST AERODYNAMIC PERFORMANCE

AVERAGE BENCHMARKED TYRES VS P ZERO™ RACE SL-R

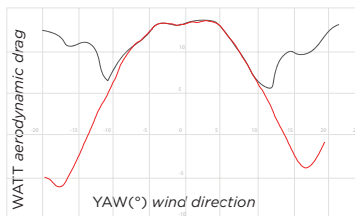

UP TO 5-10 WATT SAVING IN HIGH WIND CONDITIONS


Changing the air's angle changes the power required. The red line shows lower resistance, so it's more efficient.

4 MOUNTING & SIZING

**TUBELESS
READY**



Developed on the ETRTO standards and for moder wide rims. Tires are compatible with Hookless Rims subject to the specified max pressure limitation.

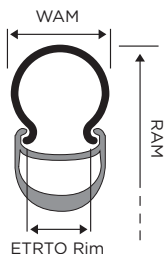

PZERO™ RACE SL-R 28-622		
Size development		
RIM	WAM	RAM
19 C	28,5mm	342mm
21 C	29mm	342mm
23 C	30mm	342mm

PZERO™ RACE SL-R 30-622		
Size development		
RIM	WAM	RAM
21 C	30,5mm	344mm
23 C	31mm	344mm
25 C	32mm	344mm

Aerodynamics optimized for modern wide rims 22 to 25mm inner rim width

DESCRIPTION	RIM	IPCODE	CASING	TECHNOLOGY	WEIGHT (g)	COMPOUND
PZERO™ Race SL-R 28-622	19 C	4801900	120 tpi, TLR	LiteCORE & PAAS	275	SmartEVO ²
PZERO™ Race SL-R 30-622	21 C	4802000	120 tpi, TLR	LiteCORE & PAAS	295	SmartEVO ²
PZERO™ Race SL-R 28-622 Team Edition	19 C	4802200	120 tpi, TLR	LiteCORE & PAAS	275	SmartEVO ²
PZERO™ Race SL-R 30-622 Team Edition	21 C	4802300	120 tpi, TLR	LiteCORE & PAAS	295	SmartEVO ²

FINE TUNE YOUR PERFORMANCE

FIND THE PERFECT PRESSURE WITH OUR **PRESSURE TOOL**

www.pirelli.com/tyres/en-ww/bike/pressure-tool

